



GEDORE

TOOLS FOR LIFE

Tool Set for Auxiliary Stretch Belts



KL-0183-72 K

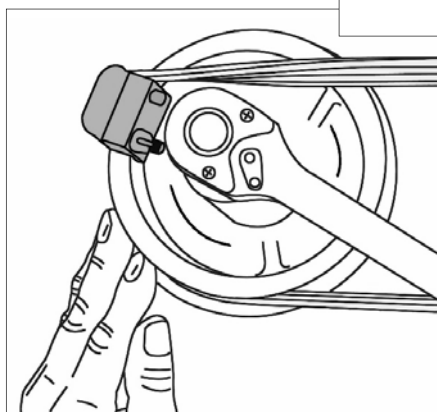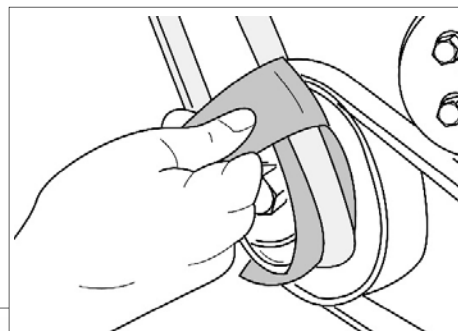

0183-72Ke170333.docx

GEDORE Automotive GmbH

Breslauer Straße 41
78166 Donaueschingen

Postfach 1329
78154 Donaueschingen - GERMANY

Phone.: +49 (0) 771 / 8 32 23-0
Fax: +49 (0) 771 / 8 32 23-90

Email: info@gedore-automotive.com
Internet: www.gedore.com

KL-0183-72 K



KL-0183-72 K Tool Set for Auxiliary Stretch Belts

Universally suitable for use on auxiliary stretch belts as found in:

BMW 1 Series (E81, E87), 3 Series (E46, E90, E91, E92, E93), 5 Series (E60, E61), 6 Series (E63, E64), 7 Series (E65, E66), X3 (E83), X5 (E53, E70), X6 (E71, E72); Chrysler Voyager III (RG); Citroën C2 (JM_), C3 (FC_, HB_), C4 (LC_, LA_, UA_, UD_), Jumper; Dacia Logan / MCV; Fiat Doblo (119, 223), Ducato (244), Fiorino, Linea, Palio (178BX), Stilo (192), Strada (178E); Ford C-Max, Fiesta V (JH_, JD_), Focus II / C-Max (DA_, DAW_), Fusion (JU_); Mazda 3 (BK12, BK14), 5 (CR19); Peugeot 206 CC (2D), 207 (WA_, WC_, WD_), 307 (3A/C, 3E, 3H), Boxer; Renault Logan (LS_); Škoda Fabia; Volvo C30, S40 II (MS), V50 (MV); VW Polo (9N_).

Field of Application

This tool set is required for the quick and professional removal and installation of auxiliary stretch belts.

Without this tool set, it is virtually impossible to remove and install these stretch belts in a professional way since, here, the accessory belt drive system operates without any belt tensioner and, as a result, releasing the belt tension is not possible.

Scope of Delivery

Pos.	Part No.	Description	Qty
-	KL-0183-72 K	Tool Set for Auxiliary Stretch Belts	1
<i>composed of:</i>			
1	KL-0183-7201	Webbing	1
2	KL-0183-702	Belt Installation Tool	1
-	KL-0183-7290	Plastic Storage Case	1

⚠ Warnings and Notes

- Do not attempt to start the engine whilst tools of the set for auxiliary stretch belts are still mounted.
- During removal and installation of the auxiliary stretch belt, the engine must only be rotated by hand.
- Any work on vehicles should only be performed by qualified specialist personnel observing and complying with the directions, provisions, and safety regulations specified by the vehicle manufacturer!
- Always refer to the vehicle manufacturer's data and instructions as only these apply to all work that is carried out on the vehicle.
- All vehicle-specific data stated herein are supplied under reserve and without commitment.

Example of Use:

Belt Removal:

- Place webbing '1' onto crankshaft pulley, under the stretch belt as shown in **Fig. 1**.

Scope of Delivery: KL-0183-72 K

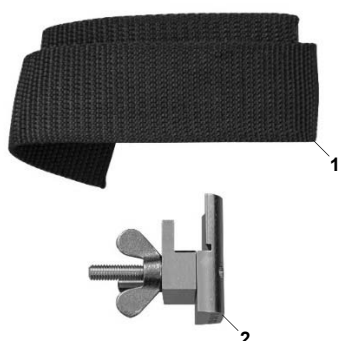


Fig. 1: Positioning the webbing.

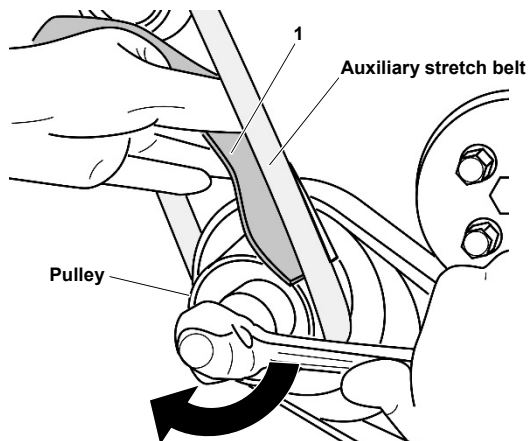


Fig. 2: **Positioning the webbing.**

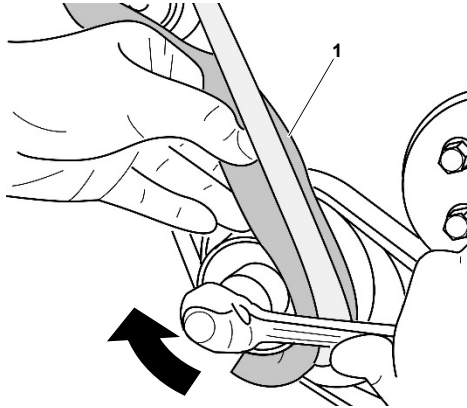


Fig. 3: **Guiding the webbing over the stretch belt.**

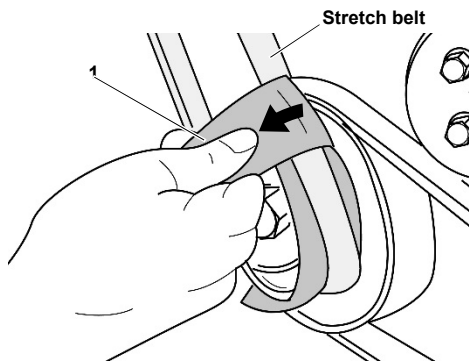


Fig. 4: **Pulling off the stretch belt.**


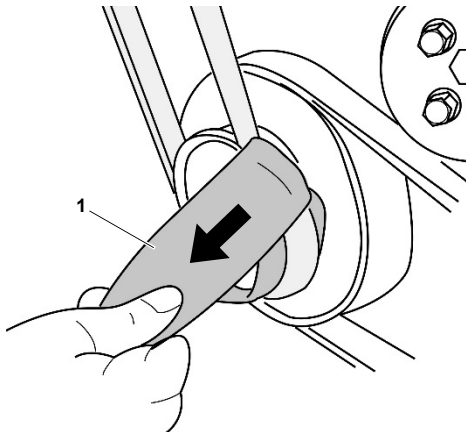


Fig. 5: **Installing the stretch belt with the aid of the belt installation tool.**

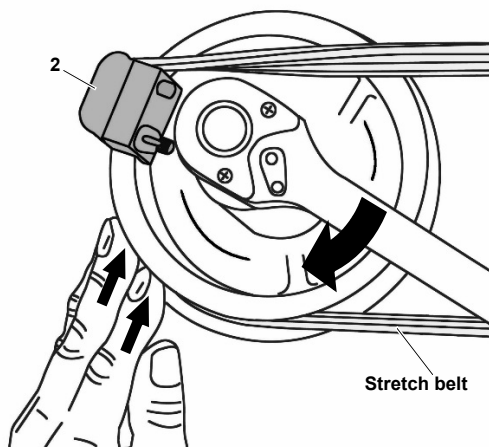

2. Turn crankshaft clockwise until approximately three quarters of webbing '1' is wrapped around the pulley. (**Fig. 2**)

Note:

Make sure that webbing is '1' is wrapped sufficiently enough around the pulley, otherwise there is a risk of it slipping off the pulley when removing the stretch belt.

Make sure that webbing '1' is not wrapped too far around the pulley, otherwise there is a risk that its end may not be long enough to be pulled for removing the stretch belt.

3. Guide webbing '1' over stretch belt as shown in **Fig. 3**.
4. By pulling the end of webbing '1' to the left (viewed from the front), remove stretch belt from pulley as shown in **Fig. 4**.

Belt Installation:

1. Mount belt installation tool '2' to crankshaft pulley as shown in **Fig. 5**.
2. Turn crankshaft clockwise and fit stretch belt onto pulley.

Note:

While pulling it onto the pulley, manually push the stretch belt into the pulley grooves if necessary, as shown in **Fig. 5**.

3. Then, check to make sure that stretch belt is correctly seated on all pulleys in accordance with the manufacturer's instructions.

GEDORE Automotive GmbH

Breslauer Straße 41
78166 Donaueschingen
Postfach 1329
78154 Donaueschingen - GERMANY

T +49 (0) 771 / 8 32 23-0
F +49 (0) 771 / 8 32 23-90
info@gedore-automotive.com
www.gedore-automotive.com

Only for USA, Canada & Mexico
Sólo para EE.UU., Canadá y México
Seulement pour les USA,
le Canada et le Mexique

7187 Bryhawke Circle, Suite 700
North Charleston, SC 29418
USA
Phone +1-843 / 225 50 15
Fax +1-843 / 225 50 20
info@gedoretools.com

GEDORE TOOLS, INC.

GEDORE WELTWEIT GEDORE WORLDWIDE

Weltweite GEDORE Servicestellen / Niederlassungen
finden Sie im Internet unter: www.gedore.com

Worldwide GEDORE service centers / offices
are listed on the Internet at: www.gedore.com